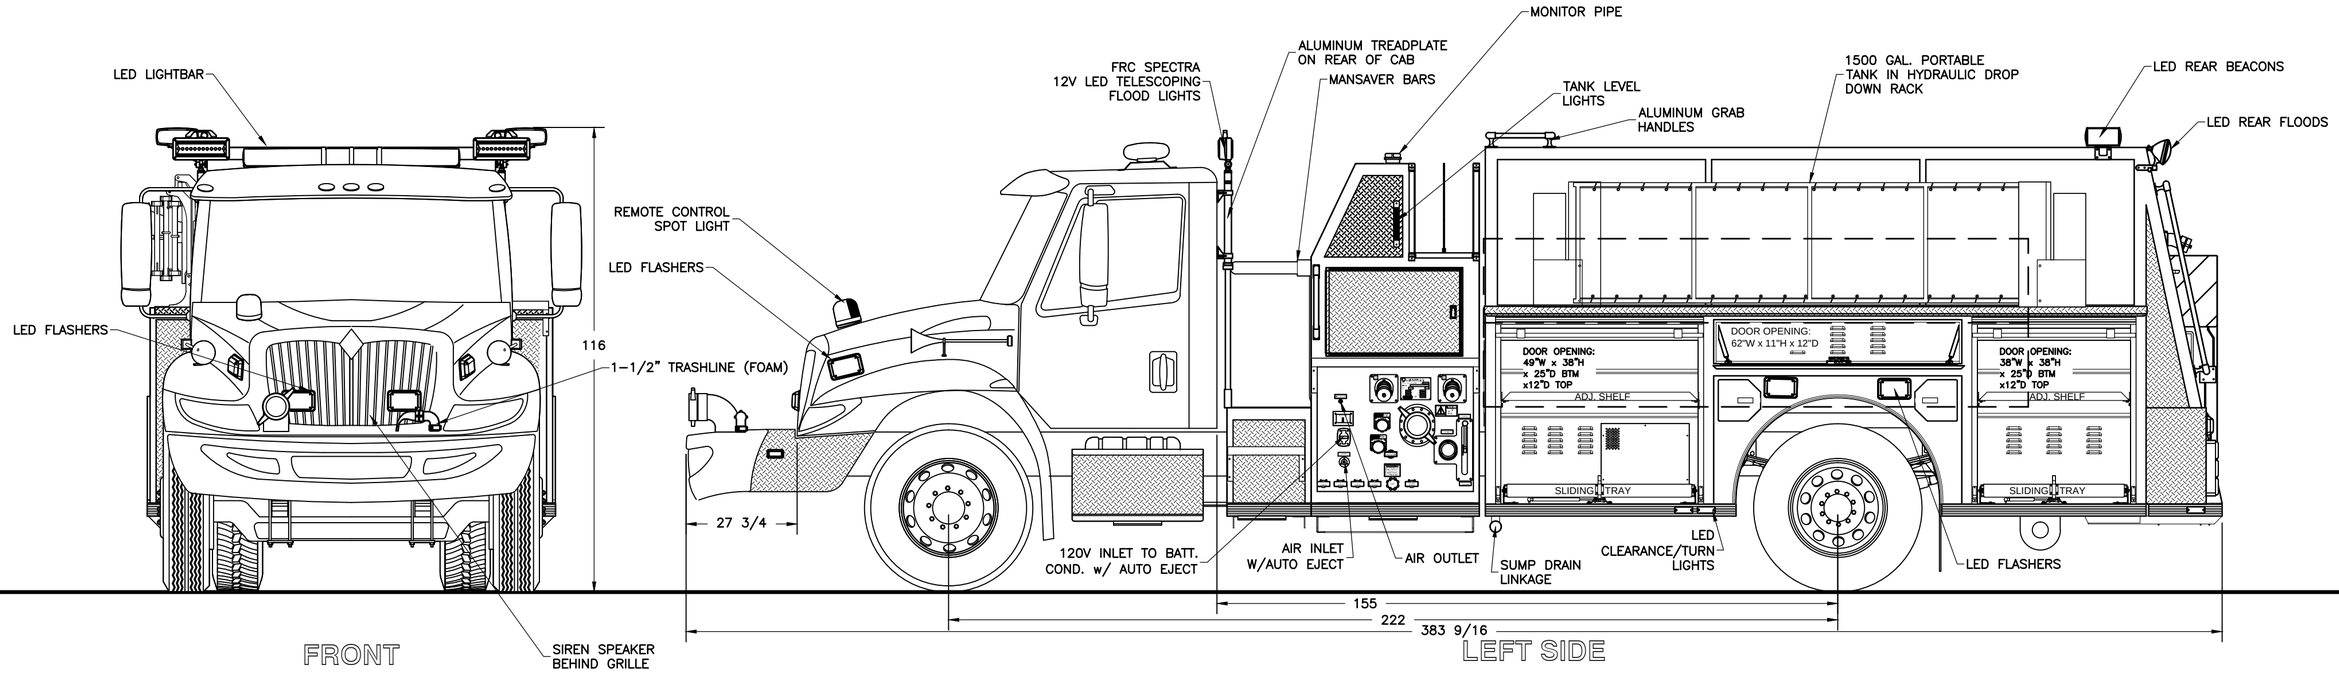

REV	DESCRIPTION	APVD BY	DATE
1	CORRECTED PUMPHOUSE LOCATION	BDC	11/18/15

REVISIONS

CHASSIS: INTERNATIONAL 4400
PUMP: HALE QFLO 1050 IGPM
TANK: 1000 Imp. Gal. POLYPROPYLENE
1 – 20 Imp. GAL FOAM CELL

FOAM: HYPRO FOAM PRO 2001 SINGLE TANK

SUCTION:
1 – 6" LEFT (ELEC MIV)
1 – 6" RIGHT (ELEC MIV)
1 – 6" REAR (5" PIPE, ELEC MIV)
1 – 6" FRONT (4" PIPE, ELEC MIV)
1 – 2 1/2" LEFT
1 – 2 1/2" RIGHT
1 – 4" TANK TO PUMP

DISCHARGES:
1 – 4" RIGHT
1 – 3" MONITOR
2 – 2 1/2" LEFT
2 – 2 1/2" REAR (RS FOAM)
1 – 2 1/2" RIGHT (FOAM)
1 – 1 1/2" TRASHLINE (FOAM)
2 – 1 1/2" CROSSLAYS (FOAM)
1 – 3 " TANK FILL

–ALL ALUMINUM CONSTRUCTION – ALL DIMENSIONS ARE IN INCHES & APPROXIMATE

STE-ANNE REGIONAL FIRE DEPARTMENT

JOB No. 18236
DRAWN BY B CARPENTER
DATE 01–30–15

METALFAB LTD.
847 CENTRAL ST. CENTREVILLE
NB. CANADA E7K 2E8

TITLE GENERAL ARRANGEMENT

METALFAB FIRE APPARATUS

DRAWING NO. FT-10684
REV 1